

VELO LED, EU

Recessed Trimless Downlight - Fixed, trimless (2mm edge) high power LED with aluminum apure© louver. High performance Cree LEDs combined with precision optics for maximum performance. LED lifetime rated for 50,000 hours, given electrical specifications are met.

Construction

- Milled aluminum and anodized fixture body, combined with signature magnetic aluminum apure© louver, available in various colors and combinations.
- Formed steel lamp holder.
- 300mA LED driver required for optimal performance and LED longevity.
- Made in Germany, Design by Porsche Design Studio.

Lamp Module

- 11W Cree LED module, includes integrated heat sink, and LED holder with adapter compatible with apure LED reflectors.

Related Accessories (one reflector per fixture required)

- AA0-10 - 10° aluminum LED reflector
- AA0-17 - 17° metalized molded plastic LED reflector
- AA0-24 - 24° metalized molded plastic LED reflector
- AA0-25 - 25° aluminum LED reflector
- AA0-36 - 36° metalized molded plastic LED reflector
- AA0-45 - 45° aluminum LED reflector
- AA3-300 - 300mA Driver (120-277V)
- AP7-BRD-EU - Velo Installation Board EU

Additional Information

- 300mA driver available for purchase (AA3-300) as a separate accessory for use with LED fixtures.
- Easy installation when used in conjunction with Velo installation board (AP7-BRD-EU).
- Damp location.
- Minimum ceiling depth - 100mm

ORDERING INFORMATION


SERIES NO.	FIXED	FIXTURE FINISH	LOUVER FINISH	COLOR TEMP.	DRIVER
AP71 - 11W LED downlight trimless	F - fixed downlight	NA - natural anodized BA - black anodized	WH - white powder coat NA - natural anodized BA - black anodized TI - titan anodized GO - gold anodized BR - bronze anodized GM - gun metal anodized RG - rose gold anodized	3080 - 3000K (80 CRI) 3090 - 3000K (90+ CRI)	EU - requires driver

AP71F - __ / __ - ____ - EU

ORDERING EXAMPLE AP71F-NA/NA-3080-EU

Delivered Performance	11 watts	
Colored Rendering index	80 CRI	90+ CRI
Lumens per Watt	78	59
Source Lumens	1015	761
Delivered Lumens	861	646

Polar Candela Distribution

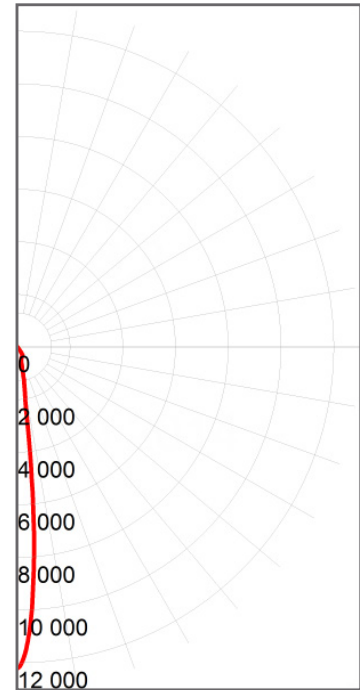

Illuminance at a Distance

Distance	Center Beam fc	Beam Width
2.0 ft	2840.87 fc	0.5 feet
4.0 ft	710.22 fc	1.1 feet
6.0 ft	315.65 fc	1.3 feet
8.0 ft	177.55 fc	1.7 feet
10.0 ft	113.63 fc	2.1 feet
12.0 ft	78.91 fc	2.2 feet
14.0 ft	57.98 fc	2.5 feet
16.0 ft	44.39 fc	2.8 feet

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	759.6	88.22%
0-40	859.5	99.82%
0-60	860.8	99.98%
60-90	0.2	0.02%
90-120	0.0	0%

CCY Multiplier	3000K	
Color Rendering Index	80 CRI	90+ CRI
R9 Value	0	60
Multiplier for Lumen Output	1.00	0.75

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance: 20%

RC % RW % RCR	80				70				50			30			10			0
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1	1.15	1.13	1.11	1.09	1.13	1.11	1.09	1.08	1.07	1.06	1.04	1.03	1.02	1.01	1.00	0.99	0.98	0.97
2	1.11	1.08	1.05	1.02	1.09	1.06	1.03	1.01	1.03	1.01	0.99	1.00	0.98	0.97	0.97	0.96	0.95	0.93
3	1.08	1.03	1.00	0.97	1.06	1.02	0.99	0.96	0.99	0.97	0.94	0.97	0.95	0.93	0.95	0.93	0.92	0.90
4	1.04	0.99	0.95	0.92	1.03	0.98	0.94	0.92	0.96	0.93	0.91	0.94	0.92	0.90	0.93	0.90	0.89	0.87
5	1.01	0.96	0.91	0.88	1.00	0.95	0.91	0.88	0.93	0.90	0.87	0.92	0.89	0.87	0.90	0.88	0.86	0.85
6	0.98	0.92	0.88	0.85	0.97	0.92	0.88	0.85	0.90	0.87	0.84	0.89	0.86	0.84	0.88	0.85	0.83	0.82
7	0.96	0.89	0.85	0.82	0.95	0.89	0.85	0.82	0.88	0.84	0.82	0.87	0.84	0.81	0.86	0.83	0.81	0.80
8	0.93	0.87	0.83	0.80	0.92	0.86	0.82	0.80	0.85	0.82	0.79	0.85	0.81	0.79	0.84	0.81	0.79	0.78
9	0.91	0.84	0.80	0.78	0.90	0.84	0.80	0.78	0.83	0.80	0.77	0.82	0.79	0.77	0.82	0.79	0.77	0.76
10	0.89	0.82	0.78	0.76	0.88	0.82	0.78	0.76	0.81	0.78	0.75	0.81	0.77	0.75	0.80	0.77	0.75	0.74